

Chains 1690

SPECIAL DUTY  
EQUIPMENT FOR



# SPECIAL DUTY EQUIPMENT

## for the

### International® Cub Cadet® Tractor

Method of mounting and using the equipment illustrated and described in this folder is accepted by International Harvester Company and will not affect the warranty of the tractor. Performance of

the equipment and its warranty are responsibilities of the manufacturers. Address inquiries regarding prices, additional specifications, and other information to the manufacturers listed below.


### Reel Mower—PENNSYLVANIA

Three-gang reel mowers available in cutting widths of 60 and 87 inches. Adjustable cutting height. Rubber-tired drive wheels. Five precision-ground steel blades cut cleanly against stationary cutting bar. Timken tapered roller bearings.

Manufactured by **AMERICAN CHAIN AND CABLE CO., INC.**  
Exeter, Pennsylvania

60-inch Mower, Order MODEL No. W21T-1


87-inch Mower, Order MODEL No. W30T-1

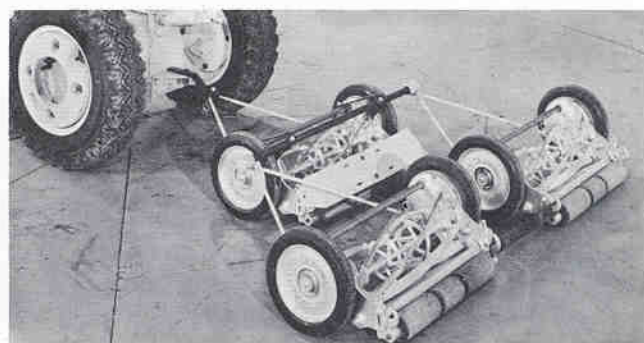

### Reel Mower—TURFMASTER

Mows a 58-in. wide swath. Adjust cutting height 1 to 2½ in. Includes three 21-in. cutting reels, 6-in. diameter. 11-in. semi-pneumatic tire drive wheels. Tapered Timken roller bearings. 5 alloy steel knives on each reel. 3.50 x 11.25 Flex-Tread tires exceptionally soft and easy on turf.


Manufactured by **DILLE & McGUIRE MANUFACTURING COMPANY**, Richmond, Ind.      Order MODEL No. GWM

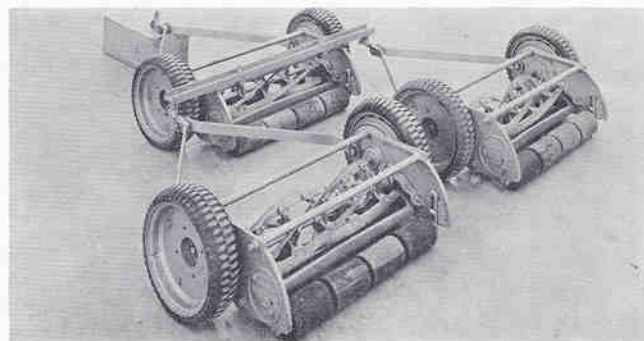

### Reel Mower—SUN-MASTR®

Trailing; cuts 57½-in. swath. Three 20-in. cutting reels, each with 5 crucible steel cutting knives, are 6-in. in diameter; 11-in. rubber-tired drive wheels are 10.85 x 1.75-in. Timken tapered roller bearings. Goodyear solid rubber with slip-proof tread. Gang frames are heavy duty 3-inch channel iron.

Manufactured by **SUNFLOWER INDUSTRIES, INC.**,  
Olathe, Kansas      Order MODEL No. T-320

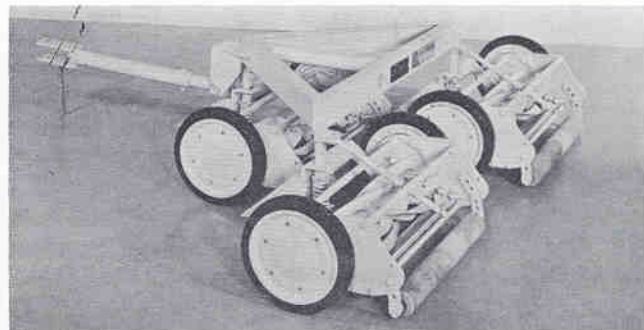


## Reel Mower—YARDMAN

Trailing three-gang reel mower. Each reel cuts a 21-inch swath. Three reels mow 57-inch swath. Rubber-tired drive wheels.

Manufactured by **YARDMAN, INCORPORATED**

Jackson, Michigan

Order **MODEL No. 1020-2**

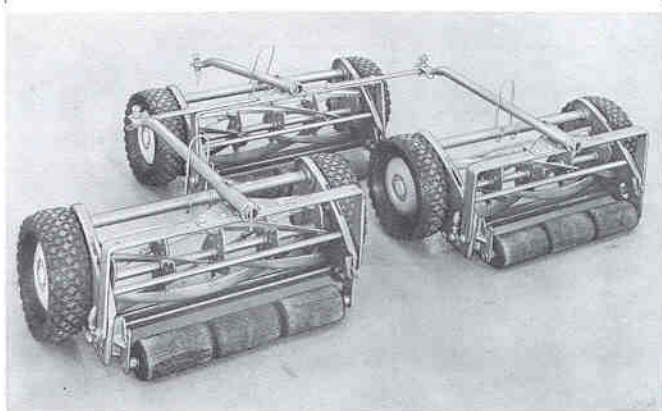


## Hammer Knife Mower—MOTT

Front-mounted, "V"-belt driven from front pto 32-in. wide. Cutting heights of  $\frac{5}{8}$ ,  $1\frac{1}{8}$ ,  $1\frac{5}{8}$ ,  $2\frac{1}{8}$ ,  $2\frac{5}{8}$ -in. 88 heat-treated, spring steel, self-cleaning knives . . . flexible mount to retract when hitting hard objects. Solid steel cutter-shaft rotates on ball bearings. Manually controlled clutch. Spring counterbalance to raise and lower with tractor lift lever.

Manufactured by **MOTT CORPORATION, P. O. BOX 278,**

La Grange, Illinois

Order **MODEL F 32**

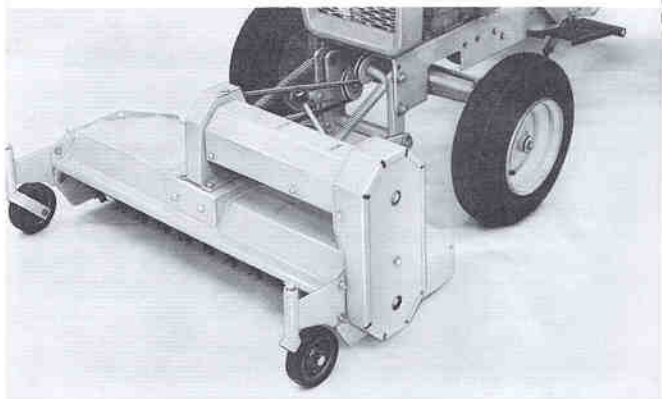


## Self-Powered Hammer Knife Mowers—MOTT

Front-mounted and trailing Hammer Knife, 32-in. wide. Independent  $5\frac{1}{2}$ -HP, 4-cycle engine. Gives full power and speed in heaviest growth, even with tractor forward engine speed reduced. Adjust pneumatic tire gauge wheels for five cutting heights. Trailing model can be multi-ganged for cutting wider swaths.

Manufactured by **MOTT CORPORATION, P. O. BOX 278,**

La Grange, Ill. Front-Mounted: Order **MODEL No. E 32**

Trailing: Order **MODEL No. T 32**

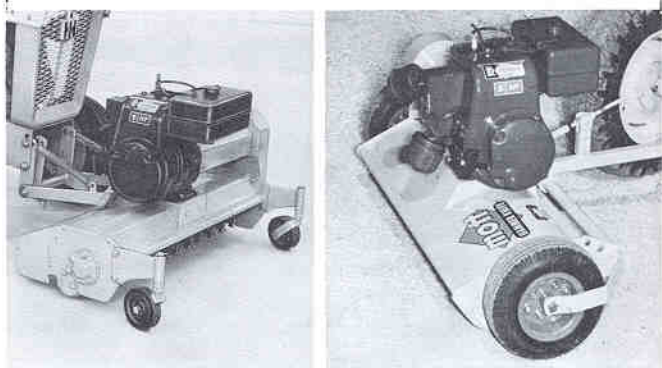

## Roller Blade—VIKING

Versatile roller blade with seeder. Grades, levels, mulches, and distributes seed. Grid-type roller leaves a distinctive soil pattern to absorb rainfall, resist erosion. In winter, it can be used to spread sand or salt on drives and walks. Roller blade width is 36 inches. Width of seeder is 30 inches.

Manufactured by **VIKING MANUFACTURING COMPANY**

Manhattan, Kansas

Order **MODEL No. 33**




## Lawn Sweeper—LAMBERT

30-in. wide, with 9-bushel capacity hamper. Can be dumped by operator from his position on tractor. Sweeping height adjustable within 3-in. range. Tufts on brush are staggered to insure clean sweeping. All-steel frame. 1 $\frac{3}{4}$ -in. wide, checker-tread semi-pneumatic tires. Attachments available: Wind apron.

Manufactured by **LAMBERT INCORPORATED,**

519 Hunter Avenue, Dayton 4, Ohio

Order MODEL No. 304 DH

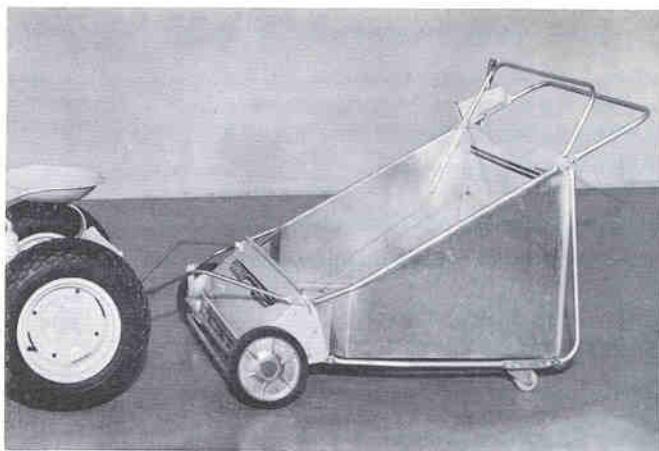


## Lawn Rake—ROBBIE

48-in. wide. Two rows of tines — 45 flexible steel, rust-resistant tines in each row. Forward row digs, rear row collects debris until dumped and cleaned by handy lever lock handle. Heavy-duty frame, carried on two 10 $\frac{1}{4}$  x 3 $\frac{1}{4}$ -in. wheels with sintered iron bearings. Weight box.

Manufactured by **ROBBIE RAKE, 117 South Elkhart Ave., Elkhart, Indiana**

Order MODEL No. TR 48H

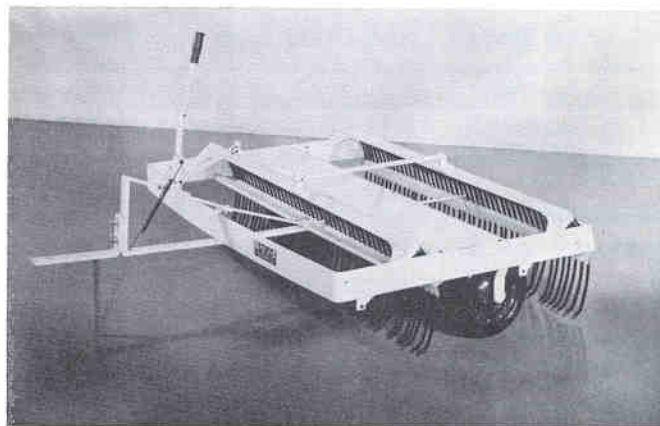

## Seeder-Fertilizer Distributor—SCHNEIDER

30-in. wide, with 85-lb. capacity hopper. Force feed flow provided by cam-action agitator. Hand lever control starts and stops flow. Calibrated dial controls rate of application. Removable, easily cleaned shutter slide. Adjustable baffle plate prevents bridging.

Manufactured by **SCHNEIDER METAL MANUFACTURING COMPANY, 1805 South 55th Ave., Chicago 50, Illinois**

Order No. 30 TRACTOR HITCH MODEL




## Lawn Roller—KENSICO

32-in. wide. Heavy gauge steel drum is 24-in. in diameter, carried on roller bearings. Scraper blade provides self-cleaning action. Any desired amount of water ballast can be added up to a maximum of 550 lb.

Manufactured by **KENSICO MANUFACTURING CO., INCORPORATED, Hubbells Road, Mount Kisco, New York**

Order No. 525

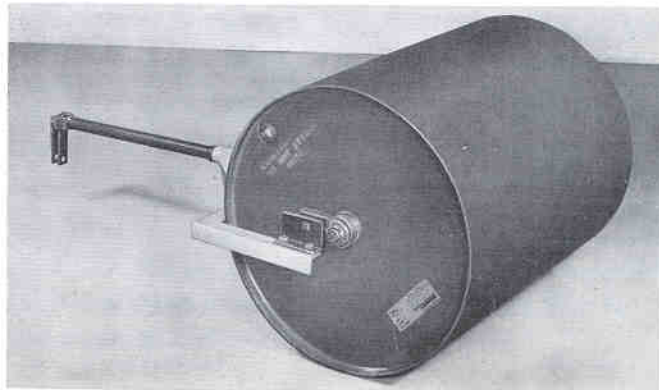

7750

## Spiker-Aerator — KENSICO

32-in. wide, with 16 replaceable tempered spike disks. Adjusts to provide either smooth or rough spiking action. Axle rolls smoothly on roller bearings. Weight pan.


Manufactured by **KENSICO MANUFACTURING CO.,**  
**INCORPORATED, Hubbells Road, Mount Kisco, New York**  
Order **MODEL No. 425**



## Lawn-Aerator — GREENLAWN

32-in. wide, with five rotating disks and two 18-in. diameter drums. Each disk carries 8 tube-type teeth. Penetrates to 2¾-in. depths. All-steel construction. Oil-lite bearings. Weighs 320 lb.; 525 lb. with maximum water ballast added to drums. Optional transport wheels.

Manufactured by **GREENLAWN AERATORS, INC.,**  
**P.O. Box 501, Granville, Pennsylvania**  
Order **MODEL No. PL** (without transport wheels)  
Order **MODEL No. PLTW** (with transport wheels)

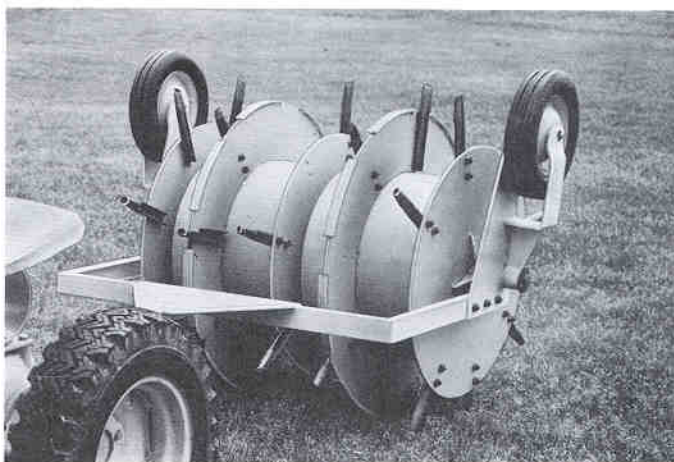

## Rotary Tiller — PLANET JR.

Separate 3-HP Briggs & Stratton engine. Tills 32-in. wide path. Two sections each of twelve 14-in. dia. Bolo-type tines. Removable tine assembly. Primary drive "V"-belt. Intermediate and final drive are roller chains in sealed, heavy-duty housing to retain lubricant. Tractor equipment required: 3-point hitch.

Manufactured by **S. L. ALLEN & CO., INC.**  
**5th and Glenwood Avenue, Philadelphia 40, Pa.**  
Order **MODEL No. 0-32**





## Rotary Tiller Attach. — PLANET JR.

Pick-tine Assembly replacement for Bolo tines. Twenty-four specially designed pointed steel tines for breaking up hardest-packed soils. Consists of two sections, twelve teeth on each.

Aerator Assembly replacement for Bolo tines. Twenty-four hardened and tempered steel spoons with special springs for quick snap-back action. to prevent tearing of turf. Two sections.

Manufactured by **S. L. ALLEN CO., INC.**  
**5th and Glenwood Avenue, Philadelphia 40, Pa.**  
Pick-tine Assembly: Order **MODEL No. 0-33**  
Aerator Assembly: Order **MODEL No. 0-38**

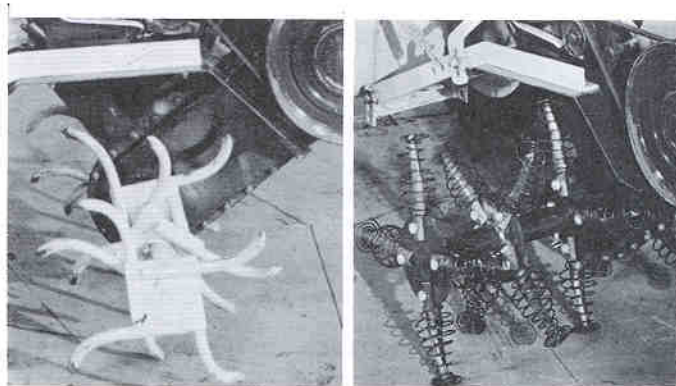

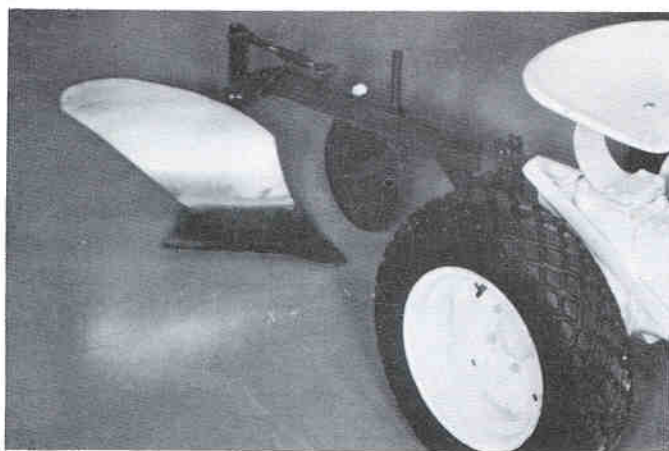

## Moldboard Plow\* — BRINLY-HARDY

10-in. moldboard plow. Recommended plowing depth is 5 in. Depth easily set by self-locking screw. 10-in. rolling coulter. Raised, lowered by tractor lift lever. Tractor equipment required: 3-point hitch.

Manufactured by BRINLY-HARDY CO.

340 East Main Street, Louisville, Kentucky

Order MODEL No. PP 100

\$8.00

52

## Disk Harrow\* — BRINLY-HARDY

Rear-mounted single-section disk harrow adjusts to cut at 10, 15, or 20-degree angle. Works a 29 to 39-inch width, depending on angle. Eleven-inch diameter, heat-treated hi-carbon blades. Raised, lowered by tractor lift lever. Trailing tandem disk harrow formed by adding rear gang. Tractor equipment required: 3-point hitch.

Manufactured by BRINLY-HARDY COMPANY

340 East Main Street, Louisville 2, Kentucky

For Single Disk: Order MODEL No. DD 100

For Tandem disk: Order MODEL No. DD 100 and DD 101

\$3.9

## Disk Harrow — PLANET JR.

Rear-mounted, single-section disk harrow. Two gangs, each with four 12-in. hardened and tempered steel disks mounted on self-oiling wood bearings. Four-inch spacing. Complete range of adjustments for hilling, bedding, or cultivating. Tractor equipment required: 3-point hitch.

Manufactured by S. L. ALLEN & CO., INC.

5th and Glenwood Avenue, Philadelphia 40, Pa.

Order MODEL No. O-62

## Rolling Spike Harrow — BRINLY-HARDY

Smoothing harrow with rotating spikes for final seedbed preparation, covering and firming seeded fields and early cultivation. 41 inches wide. High carbon steel frame, with welded spikes. Chain attachment included.

Manufactured by BRINLY-HARDY COMPANY

340 East Main Street, Louisville 2, Kentucky

Order MODEL No. SS 100

\*Requires BRINLY-HARDY three-point implement hitch

Order MODEL No. HH 100

#1 IM  
44

## Planter—PLANET JR.


Rear-mounted with precision die cast feeding mechanism. Detachable hopper, three seeding plates. Coverers, opening plows, and heavy concave rollers with spring-activated scraper. Adjustable to allow planting of rows from 12 in. to 30 in. apart. Tractor equipment required: 3-point hitch.

Manufactured by S. L. ALLEN & CO., INC.

5th and Glenwood Avenue, Philadelphia 40, Pa.

One-Row: Order MODEL No. O-AB 34

Two-Row: Order MODEL No. O-AB 35

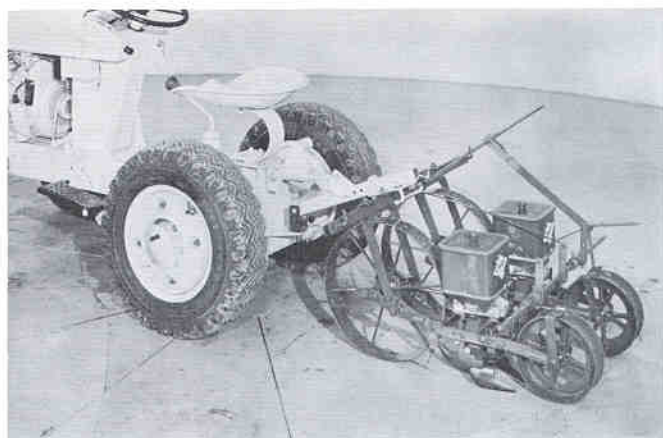


## Cultivator—PLANET JR.

Rear-mounted. Cultivates straddle or between the row. Consists of 26-in. swivel bar, offset right and left hand tool bars, clamps, standards, reversible cultivator steels, adjustable gauge wheels, rear cross-tool bar with 12-in. sweep for full-width depth control. Tractor equipment required: 3-point hitch.

Manufactured by S. L. ALLEN & CO., INC.

5th and Glenwood Avenue, Philadelphia 40, Pa.

Order MODEL No. O-12

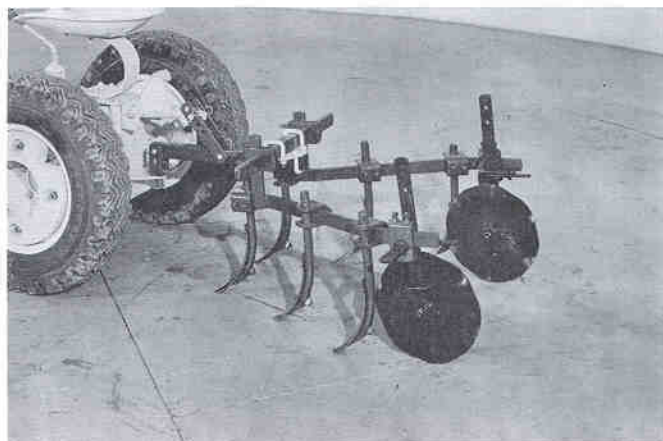

## Cultivator\*—BRINLY-HARDY


Rear-mounted, adjusts to fit 6 to 42-in. row crop spacings. Depth controlled by two adjustable, rubber-tired gauge wheels. 1½-in. x 8-in. reversible hi-carbon shovels. Raised, lowered by tractor implement lift lever. Weight box. Attachments available: Furrow opener. Tractor equipment required: 3-point hitch.

Manufactured by BRINLY-HARDY COMPANY

340 East Main Street, Louisville 2, Kentucky

Order MODEL No. CC-500

For Tool Bar Model, Order MODEL No. TB-100

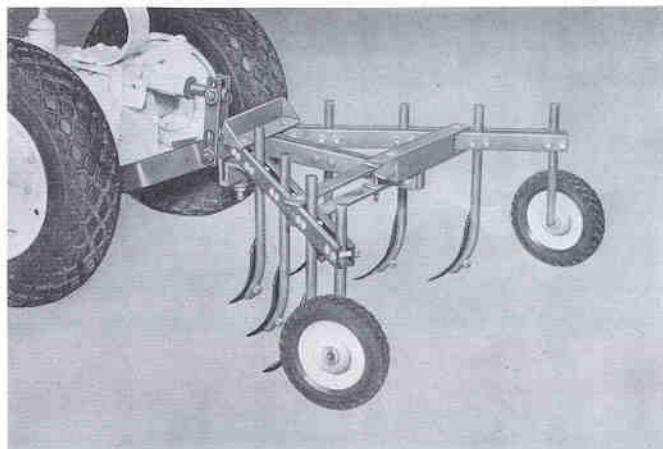

## Rotary Sweeper—JENKINS

Front-mounted broom is driven off front pto with "V"-belts. 4-ft. wide, 26-in. dia. Cleans path 42-in. wide, angles 31 deg. to left. Brush speed 150-300 rpm. Long-life bristles of Palmyra fiber. Tractor lift lever raises broom 8 in. high. Brush pressure controlled by spring tension. Attach quickly, securely with 4 bolts.


Manufactured by SWEEPSTER, INC.


2810 Baker Road, Dexter, Michigan

Order MODEL No. C-48

\*Requires BRINLY-HARDY three-point implement hitch

Order MODEL No. HH 100

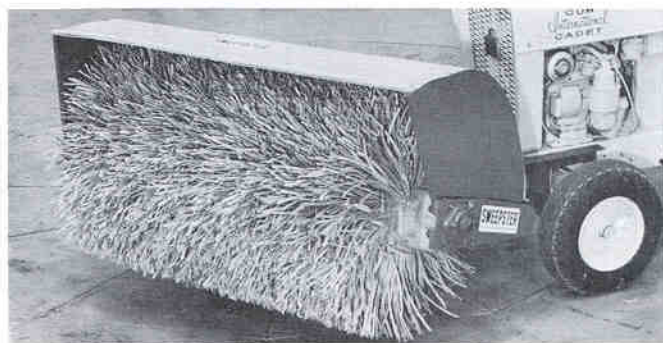

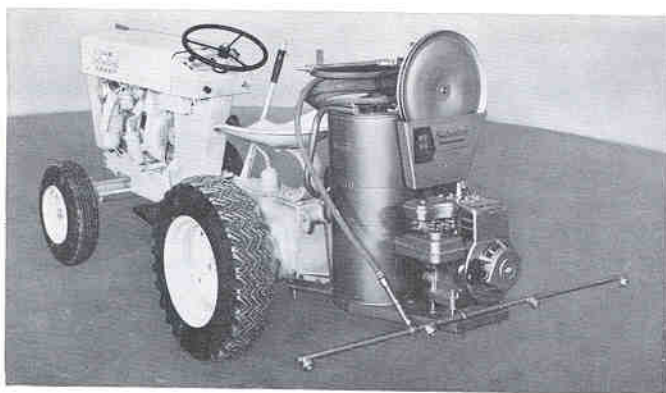

## Sprayer—HUDSON

Compact 12½-gallon capacity, engine powered sprayer mounts on back of Cub Cadet tractor. 1½-gpm pump develops up to 150 psi. Complete with 20-ft. Spray-Proof hose and adjustable power gun. 50-gallon capacity, trailing type sprayer also available.

**Manufactured by H. D. HUDSON MANUFACTURING CO.**  
589 East Illinois Street, Chicago 11, Illinois

**Order MODEL No. 12255**

**For Trailing Model, Order MODEL No. 35050**

**Trailer Hitch, No. 5950**

**4 Ft. Weed Boom, No. 1049A**




## Sprayer—MACKISSIC

15-gallon capacity front-mounted sprayer, driven by tractor front pto. 300 lb. maximum pressure, sprays distances up to 35 ft. with spray gun. Boom sprayer optional. Handles any sprayable material. Tank interior coated to prevent corrosion. Adjustable nozzle, pressure control valve. 25 ft. of hose with spray gun.

**Manufactured by A. E. MACKISSIC COMPANY**  
Parker Ford, Pennsylvania

**Order MODEL No. CC-E**

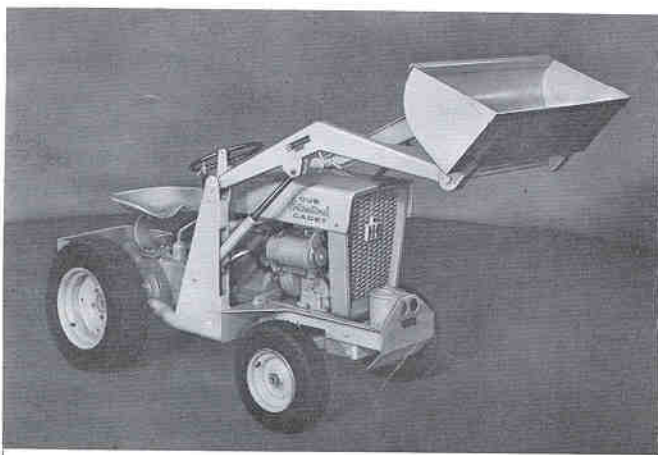


## Loader—DANCO

Lifts 300-lb. loads. 50-in. lift height. Raised and lowered hydraulically by two single-acting lift cylinders. 3 gpm front-mounted hydraulic pump.

All-welded, formed steel box construction. Automatic bucket lock. 150-pound rear counterweight recommended. Weight, 300 lb. approx.

**Manufactured by DANUSER MACHINE WORKS, INC.**  
P.O. Box 5095, Tulsa, Oklahoma

**Order MODEL No. RD-300**

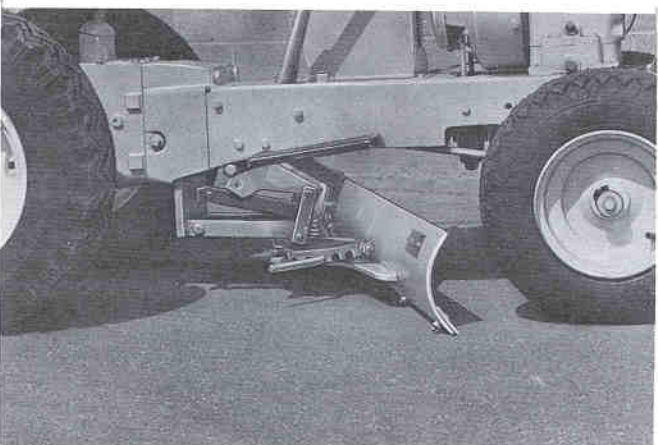

## Blade—COVINA

42-inch wide, 6-inch high, blade is center-mounted under the Cub Cadet, and is controlled by the tractor's implement lift lever. The blade can be angled manually to the right or to the left, and can be tilted down at either end.

**Manufactured by COVINA EQUIPMENT COMPANY**  
Irwindale, California

**Order Model 161**


## Floor Sweeper—LAMBERT

Trailing floor sweeper, including 9-inch gutter brush, sweeps a 37-inch path. Sweeper is powered by an independent 2¼-hp air-cooled gasoline engine. Brushes are driven through a centrifugal clutch and V-belt.

Manufactured by **LAMBERT, INCORPORATED**

Dayton, Ohio

Order Model GP-37B

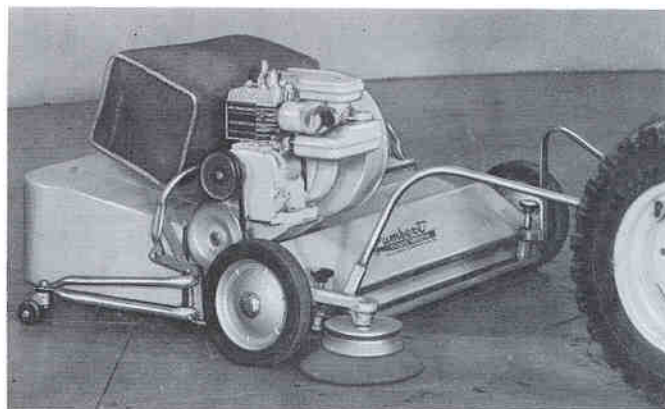

## Golf Ball Retriever—WITTEK


Two-gang, three-gang, and five-gang units available. Unit is front-mounted so tractor wheels can't pack golf balls into turf. Liquid ballast and weights required for rear wheels. With 5-gang unit, 170-lb. weight attached to front mounting brackets is required for adequate steering control.

Manufactured by **WITTEK GOLF RANGE SUPPLY COMPANY**

Chicago 39, Illinois 5-Gang Unit, Order Model Super

3-Gang Unit, Order Model Senior

2-Gang Unit, Order Model Junior

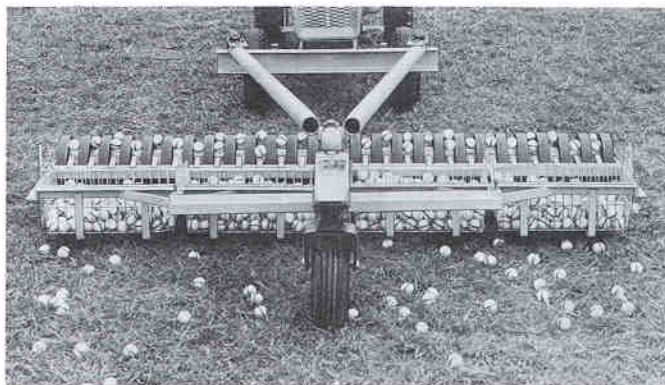

## Umbrella—SNOW

New IH yellow and white "Sun-brella" with a smart, fringed edge wards off the summer sun, makes Cadet operations cool and pleasant. Long-lasting, double-stitched cover, 54 inches square. Web-reinforced corners with extra-heavy grommets. Zinc-plated, rust-resistant 1¼-inch steel tubing shaft, easy to install, easy to remove.

Manufactured by **THE SNOW COMPANY**

Omaha, Nebraska

Order MODEL No. TU 61



## Lawn Sweeper—PARKER

28-in. wide with 10-bushel capacity hamper. Can be dumped by operator from his position on Cub Cadet tractor. Easily maneuvered, sweeper has swivel caster wheels mounted on tubular frame. Checker-tread drive wheels, with sleeve bearings, drives the anti-wrap reel.

Manufactured by **PARKER SWEEPER COMPANY**

Springfield, Ohio

Order MODEL No. TE-6028



*Specifications subject to change without notice.*

**INTERNATIONAL HARVESTER COMPANY • 180 NORTH MICHIGAN AVE. • CHICAGO 1, ILLINOIS**